


Straps for Attachment

Profiles used to secure the fabric and clamping profiles to the pocket filter frame. We supply straps with or without holes for the pockets.

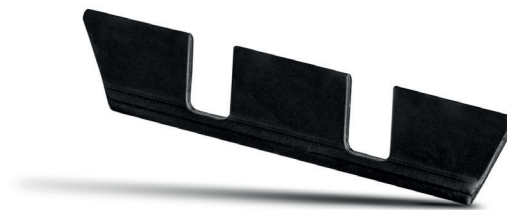

Material			
Recycled ABS			
Surface			
Matte or glossy			
Color			
Black or grey			
Packing			
Cardboard box of 1000 - 2000 pieces			
Cutouts for pockets			
with cutouts / without cutouts			
Lenght			
267 mm, 470 mm, 572 mm, 872 mm, 3 000 mm or as specified			
Use			
Part of the pocket filter frame			
Chemical resistance			
Against dilute acids and bases as well as aliphatic hydrocarbons, oils and fats, alcohols, petrol and oils			
Solvents			
Aceton			
Properties			
Thermal	Softening temperature	ISO 306	92 - 102 °C
	Heat deflection temperature	ISO 75	85 - 95 °C
Mechanical	Tensile strength v tahu	ISO 179	25 - 40 KJ/m ²
	Bending strength	ISO 178	2 000 - 2 100 MPa
Catalog numbers			
PF-4-20,0			
PF-4-20,6			
PF-4-21,6			
PF-4-23,0			
PF-4-24,0			
PF-4-26,0			